

VIM Series Axial Flow Fan, With Metallic Propeller

Impeller and body material of fan: Steel with electrostatic paint coating
Direction of rotation: Counterclockwise, seen on impeller
Motor ingress protection: IP44
Insulation class: B
Mode of operation: Continuous operation
Fan application: Supply and extract ventilation installed in various premises like industrial premises, greenhouses, commercial premises and parking.




هواکش صنعتی سنگین فلزی

VIM Series Axial Flow Fan

هواکش صنعتی سنگین فلزی

سری VIM

جنس پروانه و بدنه فن: فولاد با پوشش رنگ الکترو استاتیک
جهت چرخش: پاد ساعتگرد از سمت پروانه
درجه حفاظت موتور فن: IP44
کلاس عایق بندی موتور: B
نوع عملکرد موتور: دائم کار
کاربرد فن: تهویه فضاهای مختلف مانند فضاهای صنعتی، گلخانه ها، فضاهای تجاری و پارکینگ

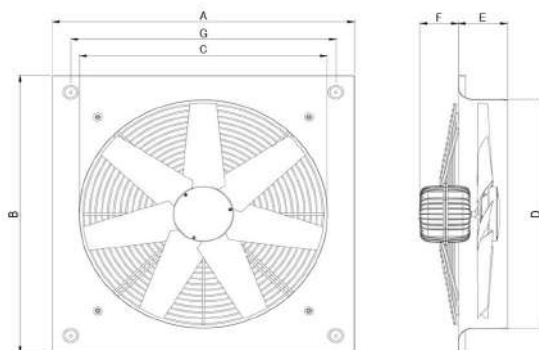




Model	A	B	C	D	E	F	G
VIM-60	725	725	580	600	115	80	620
VIM-70	850	850	690	710	135	110	730
VIM-80	960	960	780	800	135	110	830

ابعاد برحسب میلیمتر ارائه شده است.

تمامی اعداد ارائه شده مربوط به حالت آزاد (Free Delivery) کارکرد فن هستند.

NO	Model	Fan Diameter (mm)	Voltage (V)	Current (A)	Power (W)	Speed (rpm)	Air flow (m ³ /h)	IP	Weight (Kg)	Sound Pressure Level* (dBA)
1	VIM-60K4S	600	220	1.9	400	1450	8500	44	17	76
2	VIM-60K4T	600	380	0.75	370	1450	8500	44	17	76
3	VIM-70K4S	700	220	2.1	460	1450	10000	44	19.5	79
4	VIM-70K4T	700	380	0.85	470	1450	10000	44	19.5	79
5	VIM-80K6S	800	220	2.6	550	930	14000	44	22	76
6	VIM-80K6T	800	380	1.1	500	930	14000	44	22.5	76

* صدای محصول در فاصله معادل سه برابر قطر محصول (با حداقل ۱,۵ متر) اندازه گیری شده است.

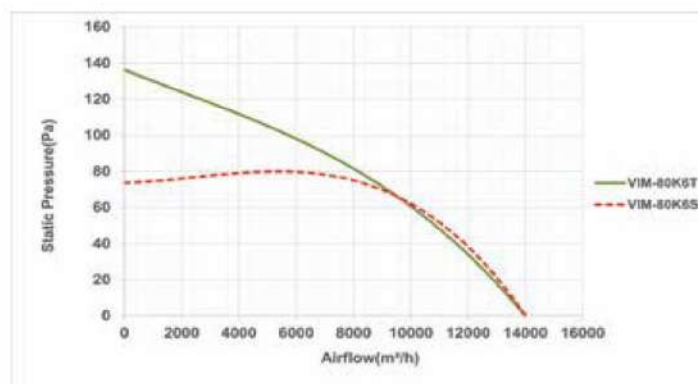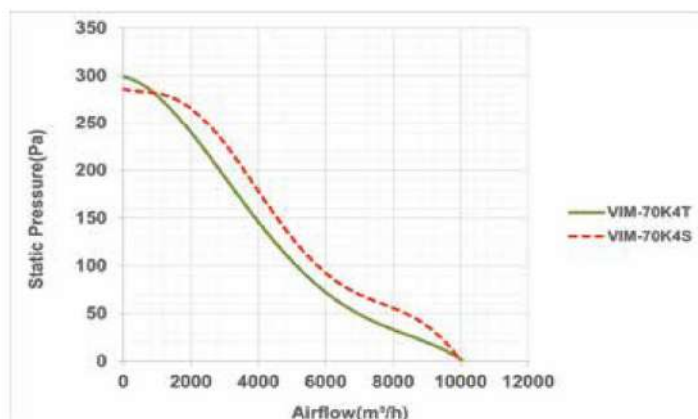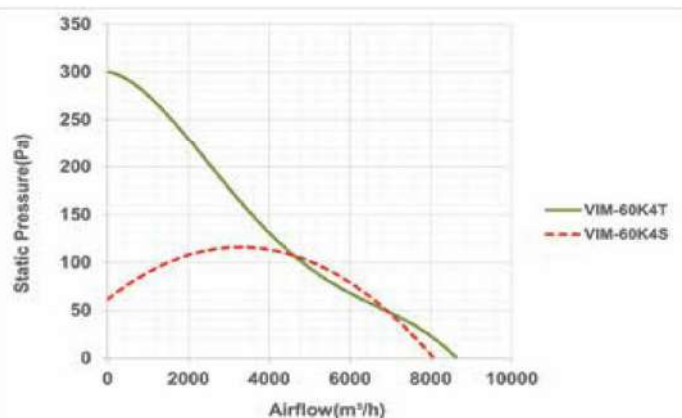

۰۲۶ - ۳۶۶ ۴۹ ۵۶۴

۰۲۶ - ۳۶۶ ۰۳ ۳۹۶



@avalsanat



۰۹۱۲ ۵۶ ۵۶ ۸۹۰



www.avvalsanat.com



avalsanat@gmail.com